

## Features & Benefits

Sealed Die-Casting Aluminum Housing with Stainless Steel Fasteners

Pendant Mounting or Direct Surface Mounting

PIR Sensor and Emergency Battery Available

UL Listed for Wet Locations

Pendant mounting or direct surface mounting

5-year limited warranty



### Housing

One piece die cast housing better waterproofing, suitable for both indoor and outdoor application.

### Mounting Bracket

Suitable for J-BOX mounting, and easy for installation, also support pendant mounting, wires coming out from the back for easier wire connections.



### Photometry

Parking Garage Photometry and polycarbonate optical lens with heat resisting.

### 1/2inch threaded hole

Support wires coming from the hole for easier wire connections. Optional PIRsensor and Emergency Battery.

## Technical Parameters

| Power             | Light Output     | Power Input        | Operating Temperature     | Efficacy            |
|-------------------|------------------|--------------------|---------------------------|---------------------|
| 27W - 60W         | 3,800 - 8,000 lm | 120-277V, 347/480V | -40°F- 104°F              | Up to 139 lm/W      |
| Color Temperature | CRI              | Certifications     | Dimming                   | Motion Sensor       |
| 4000K, 5000K      | 70 CRI           | UL, DLC Premium    | 0-10V Dimming<br>Optional | Bi-Level PIR Sensor |
| Emergency Battery | Surge Protection | Finish             |                           |                     |
| 8W 900 lm         | 10k              | DB, W              |                           |                     |

## Performance Data

| 5000K     |          |          |
|-----------|----------|----------|
| LED Watts | Lumens   | LPW      |
| 27W       | 3,800 lm | 141 lm/W |
| 40W       | 5,450 lm | 136 lm/W |
| 45W       | 5,300 lm | 118 lm/W |
| 60W       | 8,000 lm | 133 lm/W |

| 4000K     |          |          |
|-----------|----------|----------|
| LED Watts | Lumens   | LPW      |
| 27W       | 3,750 lm | 139 lm/W |
| 40W       | 5,350 lm | 134 lm/W |
| 45W       | 5,000 lm | 111 lm/W |
| 60W       | 7,800 lm | 130 lm/W |


## Ordering Information *Example: CPGX-40W-50K*

(Optional)

| Model                             | Wattage                  | Voltage               | CCT                                  | Finish                                     | Dimmable   | Controls   |
|-----------------------------------|--------------------------|-----------------------|--------------------------------------|--|--|--|
| <b>CPGX</b> Canopy<br>CPGX Series | 27W<br>40W<br>45W<br>60W | <b>Blank</b> 120-277V | <b>40K</b> 4000K<br><b>50K</b> 5000K | <b>Blank</b> Dark Bronze<br><b>W</b> White | <b>Blank</b> Non Dimmable<br><b>D</b> 0-10V Dimmable | <b>M</b> Motion Sensor<br><b>EM</b> Emergency Battery<br><b>MEM</b> Motion Sensor +<br>Emergency Battery |

Note: Motion Sensor & Emergency Battery require 0-10V Dimmable Driver

# Product Dimensions

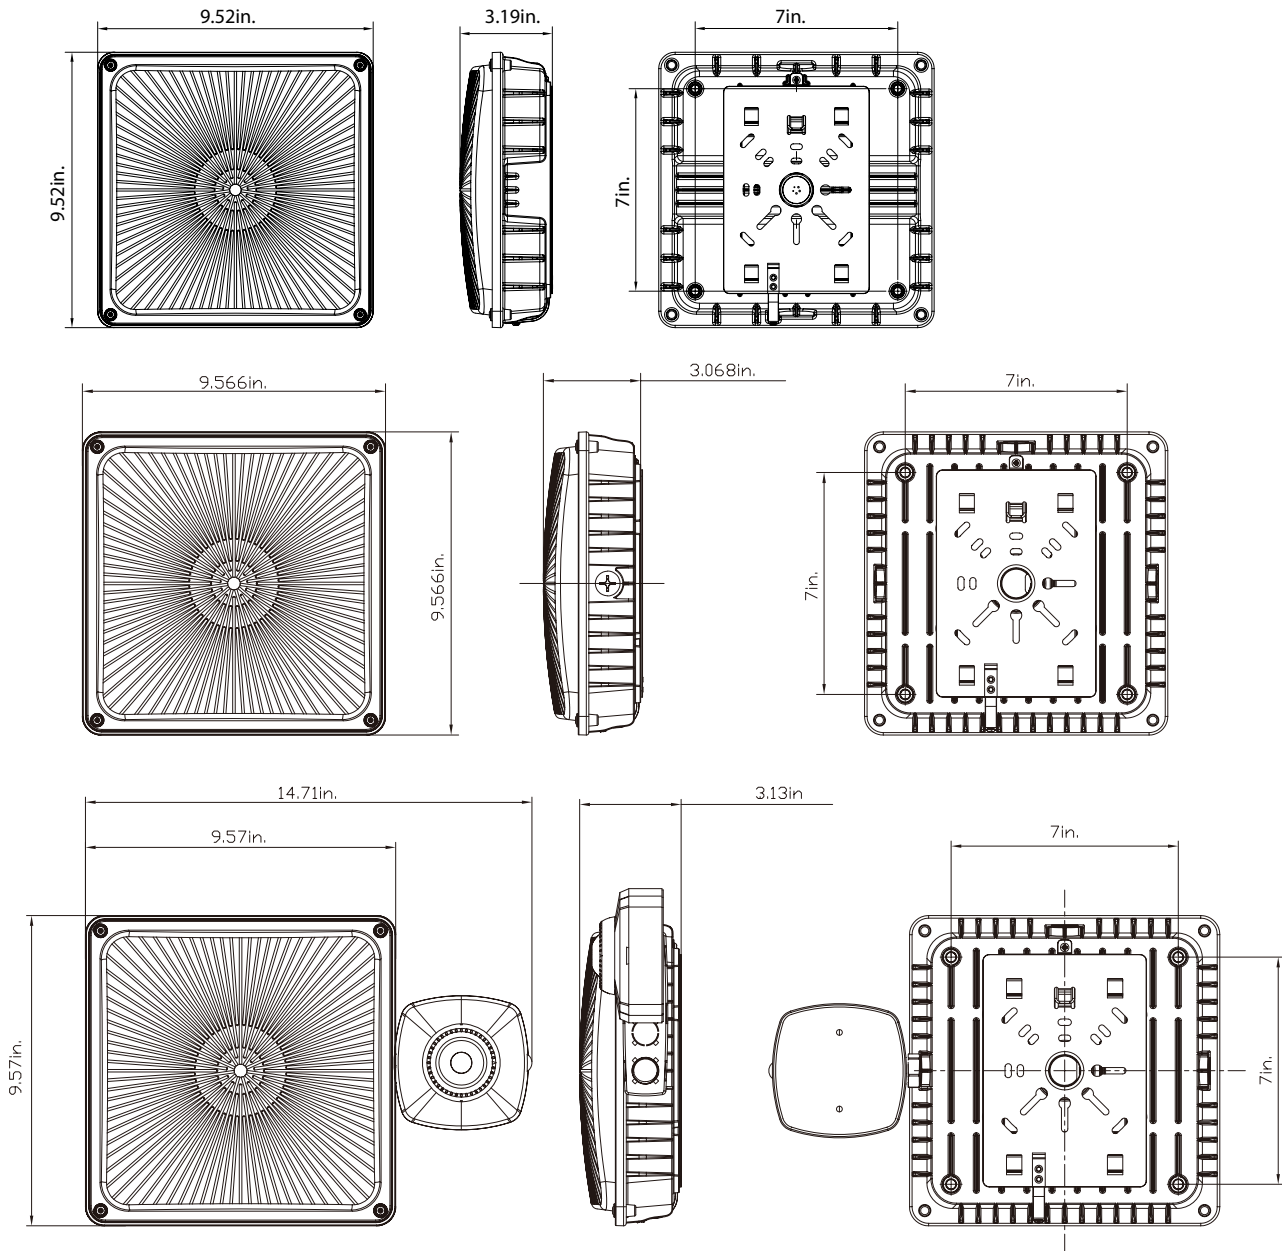

# Photometrics

