

## Features & Benefits

Compression Molded, Industrial Strength Fiberglass Housing

High Impact Lens Capable of Up to 1,500 PSI of Water Pressure

PIR Sensor and Emergency Battery Optional

Surface Mount of V Hooks for All Applications

Frosted Low Profile or Parking Garage Lens Included

Truly UL 94 Flame Rating - 5VA Rating on Housing

5 Year Limited Warranty



### Threaded Conduit

Optional PIR sensor allows for security and energy saving. And can be designed for connecting multiple fixtures, to achieve 4ft, 8ft, 12ft length etc.

### Emergency Battery

1000lm,90min

### Housing

Compression molded self-extinguishing fiberglass reinforced polyester compound with UL 5V flame rating (ASTM D635-74). F1 weatherability rating.

### Lens

Optional for DR Frost Low Profile lens and parking garage lens.

### Latch

LSNG Plastic Latch and Flush latches with "double lock" functionality



## Technical Parameters

Power	Light Output	Input	Operating Temperature	Efficacy
30W - 60W	3,100 lm - 6,100 lm	120-277V	-40°F - 113°F	Up to 113 lm/W

Color Temperature	CRI	Certifications	Mounting Options	Motion Sensor
4000K, 5000K	80 CRI	UL	Chain, Pendant, Surface	Bi-Level PIR Sensor

Dimming	Finish	Emergency Battery	Lens Output	
0-10V Dimming	White	8W 900 lm	Low Bay, Parking Garage	

## Performance Data

5000K				
LED Watts	Size	Lens	Lumens	LPW
30W	2FT	Parking Garage	3,300 lm	110 lm/W
		Low Bay	3,400 lm	113 lm/W
40W	2FT	Parking Garage	4,200 lm	105 lm/W
		Low Bay	4,300 lm	108 lm/W
45W	4FT	Parking Garage	4,800 lm	107 lm/W
		Low Bay	4,900 lm	109 lm/W
60W	4FT	Parking Garage	6,100 lm	102 lm/W
		Low Bay	6,200 lm	103 lm/W

4000K				
LED Watts	Size	Lens	Lumens	LPW
30W	2FT	Parking Garage	3,100 lm	103 lm/W
		Low Bay	3,200 lm	107 lm/W
40W	2FT	Parking Garage	4,000 lm	100 lm/W
		Low Bay	4,100 lm	103 lm/W
45W	4FT	Parking Garage	4,700 lm	104 lm/W
		Low Bay	4,800 lm	107 lm/W
60W	4FT	Parking Garage	6,000 lm	100 lm/W
		Low Bay	6,100 lm	102 lm/W

# Ordering Information Example: VLT-4FT-45W-50K-LB


(Optional)

Model	Length	Wattage	Voltage	CCT	Lens	Controls
<b>VTL</b> Vapor Tight VL Series	2FT 4FT	30W 40W 45W 60W	<b>Blank</b> 120-277V	<b>40K</b> 4000K <b>50K</b> 5000K	<b>LB</b> Low Bay <b>PG</b> Parking Garage	<b>M</b> Motion Sensor <b>EM</b> Emergency Battery <b>MEM</b> Motion Sensor + Emergency Battery


Note:  
30W and 40W are 2 feet; 45W and 60W are 4 feet

## Moutig Option

Surface mount


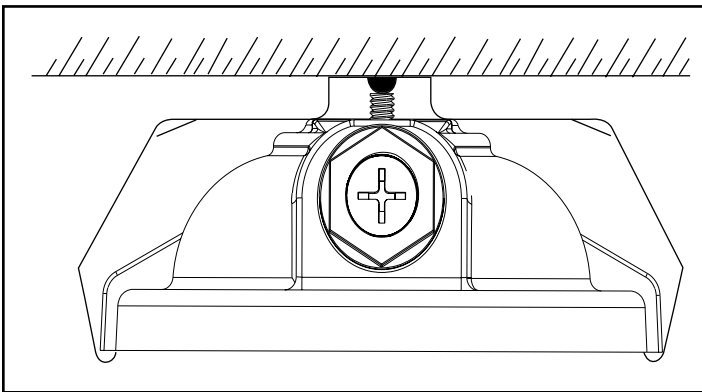


V Hooks

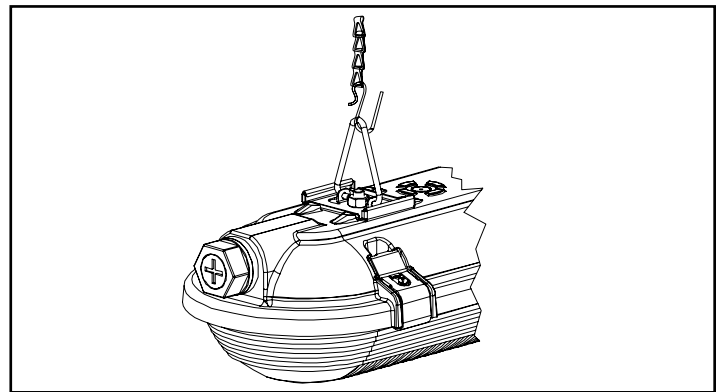



## Product Dimensions

Parking garage

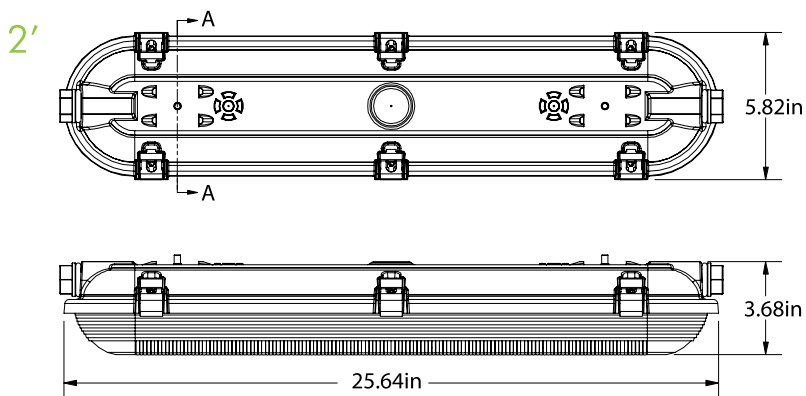

Weight: 4.943lb



Parking garage

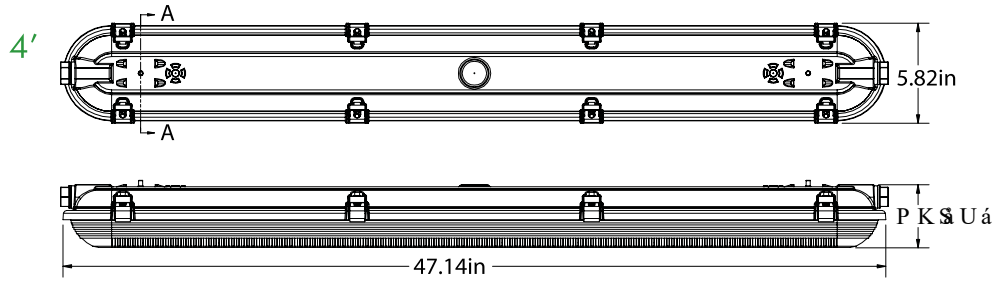

Section A-A

Weight: 9.087lb



DR Frost Low Prole Lens

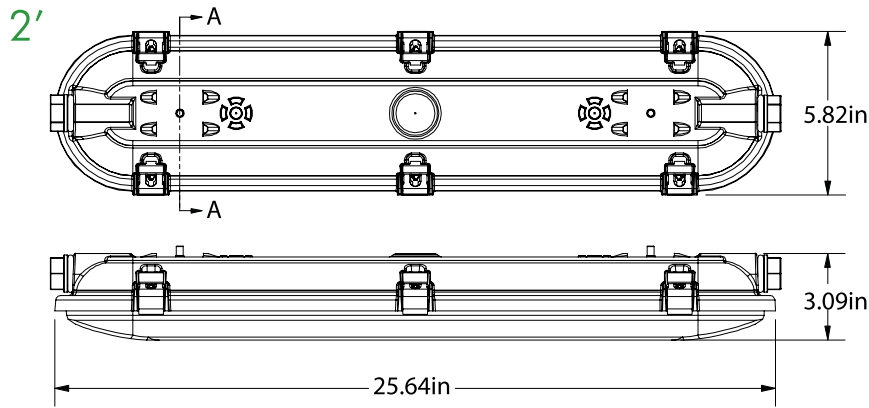

Section A-A

Weight: 4.345lb

DR Frost Low Prole Lens

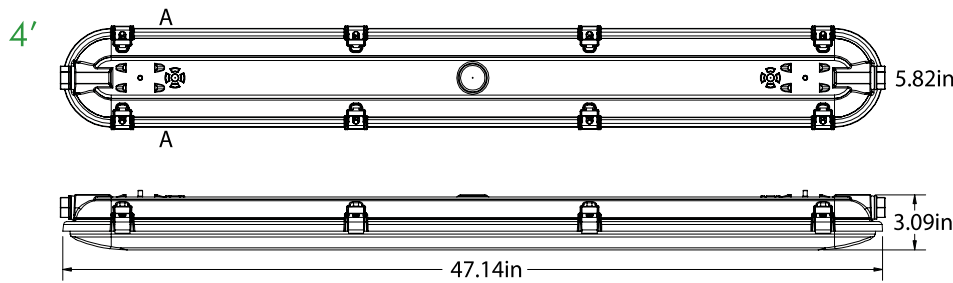


Section A-A

Weight: 7.753lb

Photometrics

Low Bay

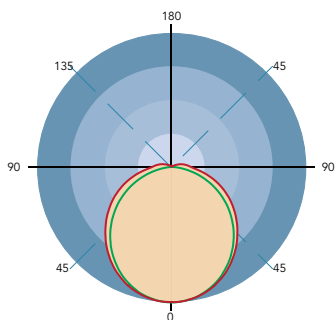

Parking Garage

