

Features & Benefits

Advanced Thermal Management Aluminum Alloy with White Powder Coat Finish

Ultra Light Weight Reduces Installation Time & Cost

Polycarbonate Optical Lens with Advanced Heat Resistance

Hook Mount Included

Bi-Level PIR Sensor Optional

UL Listed and DLC Certified

5 year limited warranty



Housing

One piece die cast housing better waterproofing, suitable for both indoor and outdoor application.

Mounting Bracket

Suitable for hook mount. And the installation steps are simple and safe.

Lens

Polycarbonate optical lens with heat resisting.

PIR Sensor

Optional PIR sensor allows for security and energy saving.



Technical Parameters

Power	Light Output	Input	Operating Temperature	Efficacy
67W - 180W	8,800 lm - 25,000 lm	120-277V	-40°F - 131°F	Up to 140 lm/W

Color Temperature	CRI	Certifications	Mounting Options	Motion Sensor
4000K, 5000K	70 CRI	UL, DLC Premium	Hook	Bi-Level PIR Sensor

Driver	Finish			
0-10V Dimming	White			

Performance Data

5000K		
LED Watts	Lumens	LPW
67W	8,800 lm	131 lm/W
97W	13,000 lm	134lm/W
100W	14,000 lm	140 lm/W
180W	25,000 lm	139 lm/W

4000K		
LED Watts	Lumens	LPW
67W	8,800 lm	131 lm/W
97W	13,000 lm	134 lm/W
100W	14,000 lm	140 lm/W
180W	25,000 lm	139 lm/W


Ordering Information *Example: HBCX-100W-50K*

(Optional)

Model	Wattage	Voltage	CCT	Finish	Sensor
HBC High Bay HBCX Series	67W 97W 100W 180W	Blank 120-277V HV 347/480V	40K 4000K 50K 5000K	Blank White DB Dark Bronze B Black	M Motion Sensor


Note:
347/480V High Voltage = 100W and 180W

Product Dimensions

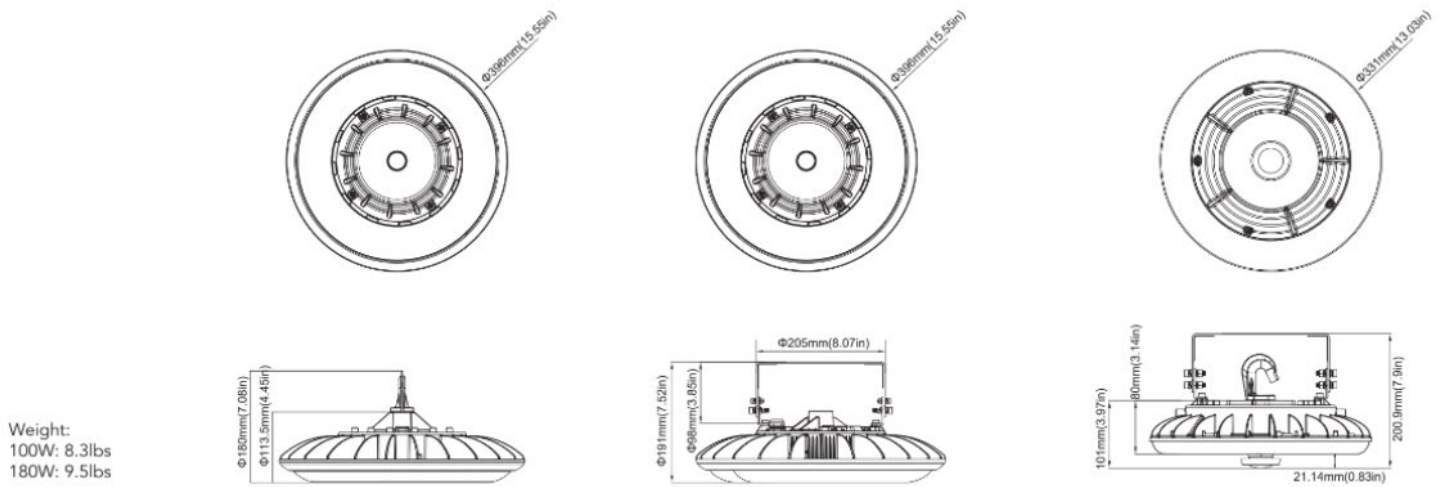

Weight:
100W: 8.3lbs
180W: 9.5lbs

Photometrics

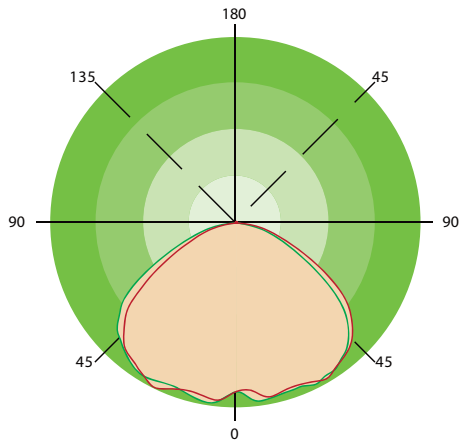

DLC Listed Models

System Watt	Voltage	CCT	DLC NO	DLC Classification
100W	120-277V	4000K	HBCX-100W-40K-[Blank,M]	Premium
100W	120-277V	5000K	HBCX-100W-50K-[Blank,M]	Premium
180W	120-277V	4000K	HBCX-180W-40K-[Blank,M]	Premium
180W	120-277V	5000K	HBCX-180W-50K-[Blank,M]	Premium

Note: Only Above Models are Currently DLC Listed