

Features & Benefits

Sealed Die-Casting Profile for Indoor and Outdoor Applications

Ultra Light Weight Reduces Installation Time & Cost

Polycarbonate Optical Lens with Advanced Heat Resistance

Hook Mount, Pendant Mount and Surface Mount Available

PIR Sensor and Emergency Battery Available

5 year limited warranty



Housing

Die-cast aluminum housing with heat dissipating fins. Sealed design with silicone strip for use in wet locations.

Installation Accessory

Available for both hook mounting and surface mounting with bracket(optional). Bracket allows to adjust the direction to illuminate any area you need.

Photometry

High Bay Photometry formed from high efficiency LEDs and scattering diuser.

PIR Sensor

Optional motion sensor allows for security and energy saving.



Technical Parameters

Power	Light Output	Input	Operating Temperature	Efficacy
67W-215W	9,100 lm -30,000 lm	120-277V, 347-480V	-40°F - 122°F	Up to 140 lm/W

Color Temperature	CRI	Certifications	Motion Sensor	Emergency Battery
4000K, 5000K	80 CRI	UL	Bi-Level PIR Sensor	8W 900 lm

Mounting Options	Finish
Hook	White

Performance Data

5000K (70 CRI)		
LED Watts	Lumens	LPW
67W	9,800 lm	136 lm/W
97W	12,800 lm	132 lm/W
140W	18,500 lm	132 lm/W
180W	24,500 lm	136 lm/W
215W	30,000 lm	140 lm/W

4000K (70 CRI)		
LED Watts	Lumens	LPW
67W	9,800 lm	136 lm/W
97W	12,800 lm	132 lm/W
140W	18,500 lm	132 lm/W
180W	24,500 lm	136 lm/W
215W	30,000 lm	140 lm/W

Ordering Information Example: HBCX06-140W-50K

(Optional)

Model	Wattage	Voltage	CCT	Finish	Sensor
HBCX 06	67W	Blank 120-277V	40K 4000K	Blank Black	M Motion Sensor
High Bay	97W	HV 347/480V	50K 5000K		B Emergency Battery
HBCX06 Series	140W				
	180W				
	215W				



Note:

1. 67W and 97W are limited to 120-277V input only



Product Dimensions

Weight:



67W: 5.71 lbs 97W: 5.95 lbs
 140W: 6.00 lbs 180W: 6.61 lbs 215W: 6.61 lbs

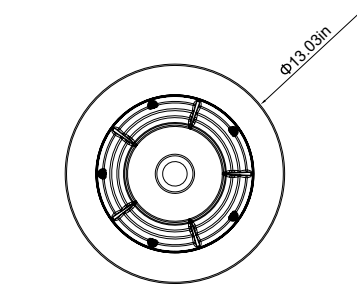

67W&97W




140W



180W&215W

Photometrics

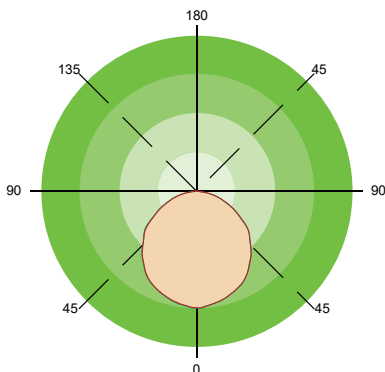

Accessories



Motion Sensor
 Integrated motion sensor available for on/off and dimming control for maximum energy savings.



Emergency Box
 Emergency battery pack would provide the necessary brightness in emergency situations. Applicable ambient temperature is 10 °C (50 °F) to 40 °C (104 °F).



U-bracket
 Use for surface mounting application. Available to adjust the angle of MHB06 to control the direction of irradiation.

DLC Listed Models

System Watt	Voltage	CCT	DLC NO	DLC Classification
67W	120-277V	5000K	HBCX06-67W-50K-[Blank,M,EM]	Standard
140W	120-277V	5000K	HBCX06-140W-50K-[Blank, M,EM]	Standard

Note: Only Above Models are Currently DLC Listed