


Features & Benefits


- Advanced Thermal Management Aluminum Alloy with White Powder Coat Finish
- Available in 1x2, 2x2 and 2x4 Configurations
- Lumen Packages up to 60,000 lm; Efficacy up to 143 lm/W
- PIR Sensor and Emergency Battery Optional
- Aircraft Cable Included, Pendant or Surface Mount Upon Request
- Lens Meets DLC 5.1 Standards for UGR (Unified Glare Rating)
- UL Listed for Damp Location
- L70 100,000-hour LED Lifespan
- 10-Year Limited Warranty



90W/100W/130W



180W/210W

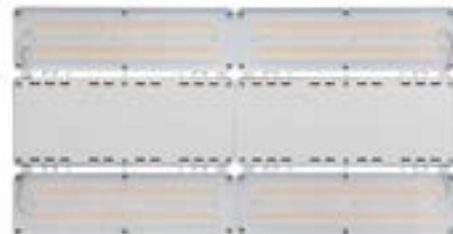

260W



360W/420W



Emergency Battery Box

90min, 900lm
Provision of safe lighting.

Optics

Engineered Optics Glare control lens provides comfortable illumination.

Motion Sensor

Optional motion sensor allows for security and energy saving.

Housing

Die-casting aluminum enables sturdy structure and superior thermal performance.



Technical Parameters

Power	Light Output	Input	Operating Temperature	Efficacy
90W - 420W	12,200 lm - 60,000 lm	120-277V, 347/480V	-40°F - 131°F	Up to 143 lm/W

Color Temperature	CRI	Certifications	Motion Sensor	Driver
4000K, 5000K	80 CRI	UL	Bi-Level PIR Sensor	1-10V Dimming

Emergency Battery	Mounting	Finish		
16W, 2,000 lm, 90 min	Chain, Pendant	White		

Performance Data

4000K		
LED Watts	Lumens	LPW
90W	12,200 lm	136 lm/W
100W	14,000 lm	140 lm/W
130W	18,000 lm	138 lm/W
180W	24,300 lm	135 lm/W
210W	30,000 lm	143 lm/W
260W	36,000 lm	138 lm/W
360W	49,000 lm	136 lm/W
420W	60,000 lm	143 lm/W

5000K		
LED Watts	Lumens	LPW
90W	12,200 lm	136 lm/W
100W	14,000 lm	140 lm/W
130W	18,300 lm	141 lm/W
180W	24,300 lm	135 lm/W
210W	30,300 lm	144 lm/W
260W	36,400 lm	140 lm/W
360W	49,000 lm	136 lm/W
420W	60,000 lm	143 lm/W

Ordering Information

Example: HBLX5-180W-50K

(Optional)


Model	Wattage	Voltage	CCT	Controls
HBLX5 High Bay HBLX5 Series	90W 100W 130W 180W 210W 260W 360W 420W	Blank 120-277V HV 347/480V	40K 4000K 50K 5000K	M Motion Sensor EM Emergency Battery MEM Motion Sensor + Emergency Battery

Note:


- Emergency Battery not Available while the Voltage is 347/480V

Product Dimensions


90W/100W/130W

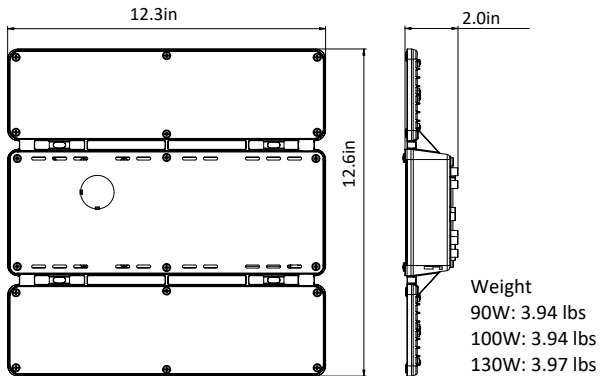


180W/210W

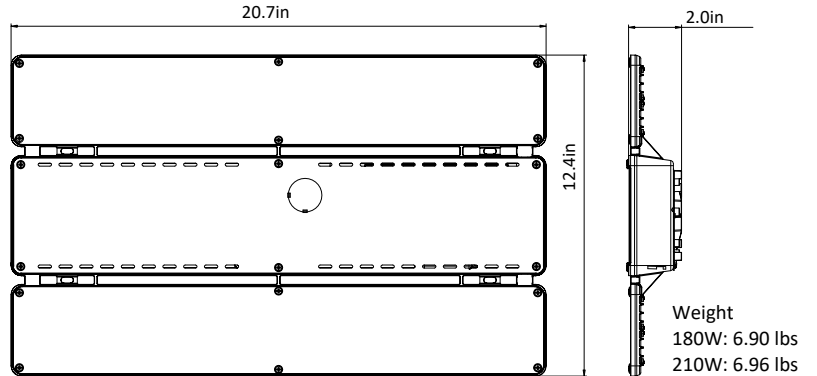

260W

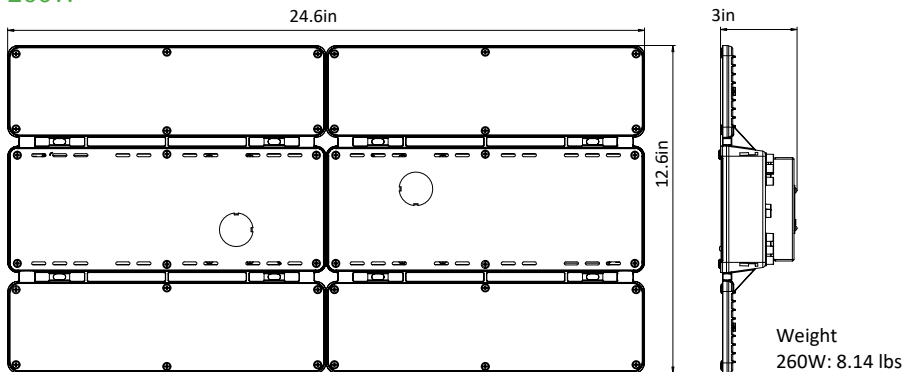

360W/420W

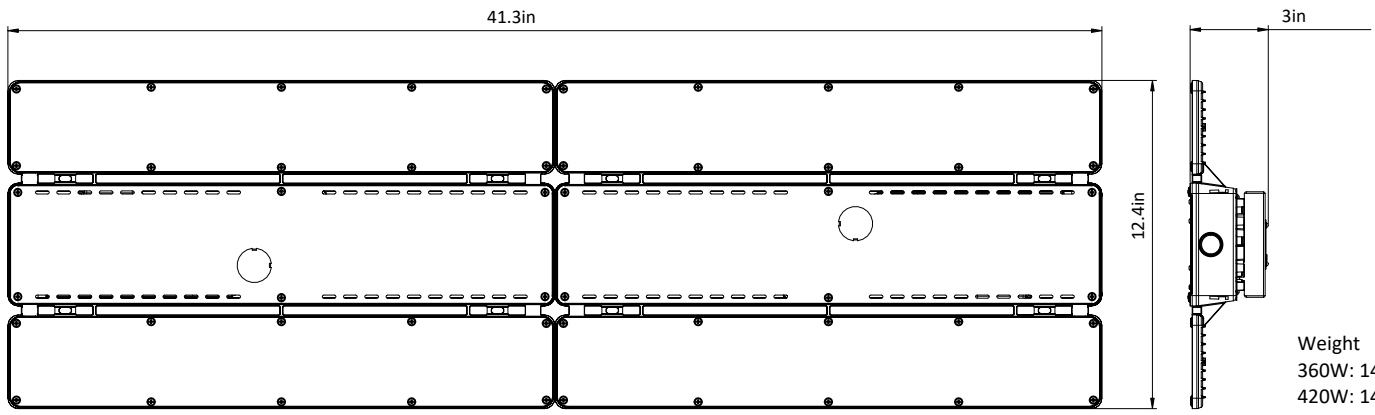

Weight
360W: 14.32 lbs
420W: 14.42 lbs

Photometrics

