

## Features & Benefits

Sealed Die-Casting Profile for Indoor and Outdoor Applications

Ultra Light Weight Reduces Installation Time & Cost

Polycarbonate Optical Lens with Advanced Heat Resistance

Hook Mount, Pendant Mount and Surface Mount Available

Anti-UV Prismatic Translucent Lens Designed to Shape the Light Uniformity and Controls Glare

Operating Temperature -40F to 104F

5 year limited warranty



60W/80W



100W/120W



155W



## Technical Parameters

Power	Light Output	Input	Operating Temperature	Efficacy
60W - 155W	6,300 lm - 17,400 lm	120-277V, 230V-240V	-40°F - 104°F	Up to 112 lm/W

Color Temperature	CRI	Certifications	Mounting Options	Finish
3000K, 4000K, 5000K	80 CRI	UL	Hook/Trunnion Mount	Black

## Performance Data

3000K (80 CRI)		
LED Watts	Lumens	LPW
60W	6,300 lm	105 lm/W
80W	8,400 lm	105 lm/W
100W	10,500 lm	105 lm/W
120W	12,600 lm	105 lm/W
155W	16,300 lm	105 lm/W

4000K (80 CRI)		
LED Watts	Lumens	LPW
60W	6,400 lm	107 lm/W
80W	8,500 lm	106 lm/W
100W	11,000 lm	110 lm/W
120W	13,000 lm	108 lm/W
155W	17,000 lm	112 lm/W

5000K (80 CRI)		
LED Watts	Lumens	LPW
60W	6,400 lm	107 lm/W
80W	8,500 lm	106 lm/W
100W	11,000 lm	110 lm/W
120W	13,000 lm	108 lm/W
155W	17,400 lm	112 lm/W




## Ordering Information *Example: HBCX09-155W-50K*

(Optional)

Model	Wattage	Voltage	CCT	Finish	Mount
<b>HBCX 09</b> High Bay HBCX09 Series	60W 80W 100W 120W 155W	<b>Blank</b> 120-277V <b>23V</b> 230V/240V	<b>30K</b> 3000K <b>40K</b> 4000K <b>50K</b> 5000K	<b>Blank</b> Black <b>D</b> Dark Bronze <b>W</b> White	<b>Blank</b> Hook Mount <b>TR</b> Turnion Mount


## Product Dimensions

---

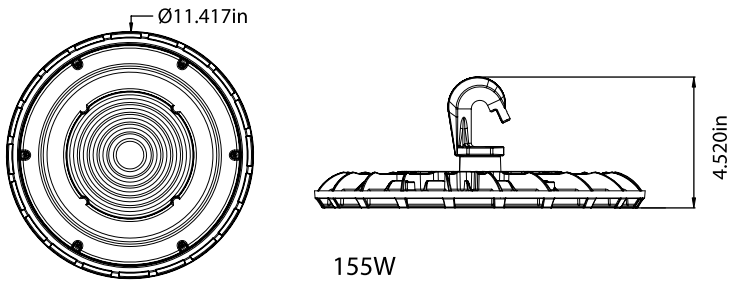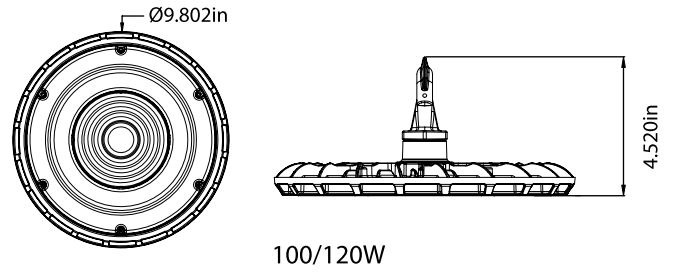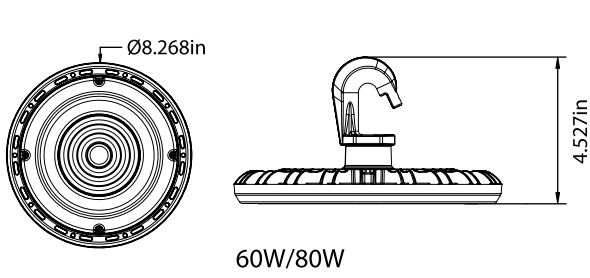

## Photometrics

---

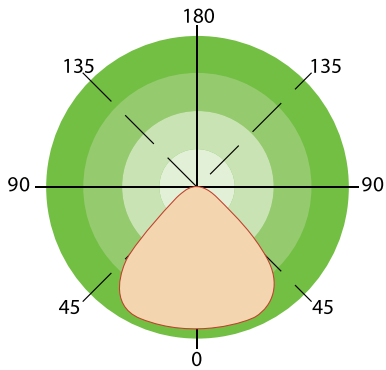

## Accessories

---



U-Bracket  
Use for surface mount

# Mounting

---



Hook Mount



Conduit Pendant Mount



U-Bracket Mount