

## Features & Benefits

One Piece Housing, Easy Installation and Maintenance

1/2" End Cap Knockouts for Connecting Multiple Fixtures

PIR Sensor and Emergency Battery Optional

Wattage Selectable: 68W, 56W, 44W; 36W, 30W, 24W, 20W

Switchable Color Temperature 3500K/4000K/5000K

Surface or Chain Mounting Options

UL 94 Flame Rated - 5VA Rating on Housing

5-year limited warranty



### CCT AND WATTAGE SELECTABLE

This fixture has the function of adjusting the lumens output and color temperature on-site.



**WATTAGE SELECT**

LV1  
 LV2  
 LV3  
 LV4

36W supports 4 positions wattage regulation;  
68W supports 3 positions wattage regulation.

**CCT SELECT**

3500K  
 4000K  
 5000K

Offer three CCT adjustable (3500K, 4000K, 5000K).

## Technical Parameters

Power	Light Output	Power Input	Operating Temperature	Efficacy
20W - 68W	2,850 lm - 10,100 lm	120-277V	-13°F - 104°F	Up to 163 lm/W
CRI	Certifications	Motion Sensor	Driver	Color Temperature
80 CRI	UL/DLC	Bi-Level PIR Sensor	1-10V Dimming	3500K,4000K, 5000K
Emergency Battery	Mounting Options	Finish		
8W 900lm	Surface, Chain	White		

## Performance Data

LSM03-4FT-36W							
Setting	System Watts	3500K		4500K		5000K	
		Lumens (80 CRI)	LPW (80 CRI)	Lumens (80 CRI)	LPW (80 CRI)	Lumens (80 CRI)	LPW (80 CRI)
LV1	36W	4,900 lm	136 lm/W	5,200 lm	144 lm/W	5,000 lm	1369 lm/W
LV2	30W	4,150 lm	138 lm/W	4,400 lm	147 lm/W	4,250 lm	142 lm/W
LV3	24W	3,350 lm	140 lm/W	3,600 lm	150 lm/W	3,470 lm	145 lm/W
LV4	20W	2,850 lm	143 lm/W	3,100 lm	155 lm/W	2,950 lm	148 lm/W

LSM03-8FT-68W							
Setting	System Watts	3500K		4500K		5000K	
		Lumens (80 CRI)	LPW (80 CRI)	Lumens (80 CRI)	LPW (80 CRI)	Lumens (80 CRI)	LPW (80 CRI)
LV1	68W	9,350 lm	138 lm/W	10,600 lm	156 lm/W	10,100 lm	149 lm/W
LV2	58W	8,150 lm	141 lm/W	9,200 lm	159 lm/W	8,800 lm	152 lm/W
LV3	44W	6,300 lm	143 lm/W	7,150 lm	163 lm/W	6,800 lm	155 lm/W

## Ordering Information *Example: LSM03-4FT-38W-XXK*

(Optional)

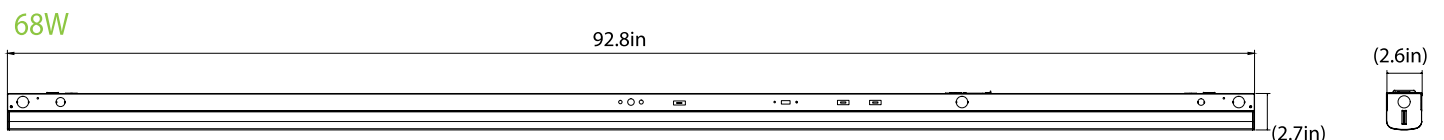
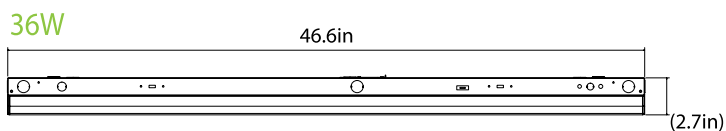
Model	Length	Wattage	Voltage	CCT	Controls
<b>LSM03</b> Linear LSM03 Series	4FT 8FT	36W 68W	<b>Blank</b> 120-277V	<b>XXK</b> 3500K/4000K/5000K <b>40K</b> 4000K <b>50K</b> 5000K	<b>M</b> Motion Sensor <b>EM</b> Emergency Battery <b>MEM</b> Motion Sensor + Emergency Battery

Note:










4FT = 38W

8FT = 68W

## Product Dimensions



## Accessories (Optional)

 <p>V-Hooks (Default)</p>	 <p>Mounting Plate (Default)</p>	 <p>Steel Wire Rope (Sold separately)</p>
 <p>PIR Sensor NO.: BR1819 Description: 120-277VAC input (Sold separately)</p>	 <p>Emergency Battery 8W 900lm 90min (Sold separately)</p>	 <p>Microwave Sensor NO.: HD027VCR Description: 12VDC input (Sold separately)</p>
 <p>Joiner Bracket Description: Aligner locks in place for easy continuous row mounting. (Sold separately)</p>	 <p>Chain (Sold separately)</p>	 <p>Wire Guard (Sold separately)</p>